


Firmware Update S0xxTURBOX EPCOM

You should initially have the **SDAPTool** application installed on a PC or Laptop in order to upgrade, you can download here

http://www.hikvision.com/us/download_more_82_i10591.html


Once installed, we click on the **SDAPTool** application, we locate the DVR to update (in this case it is a S08TURBOX)

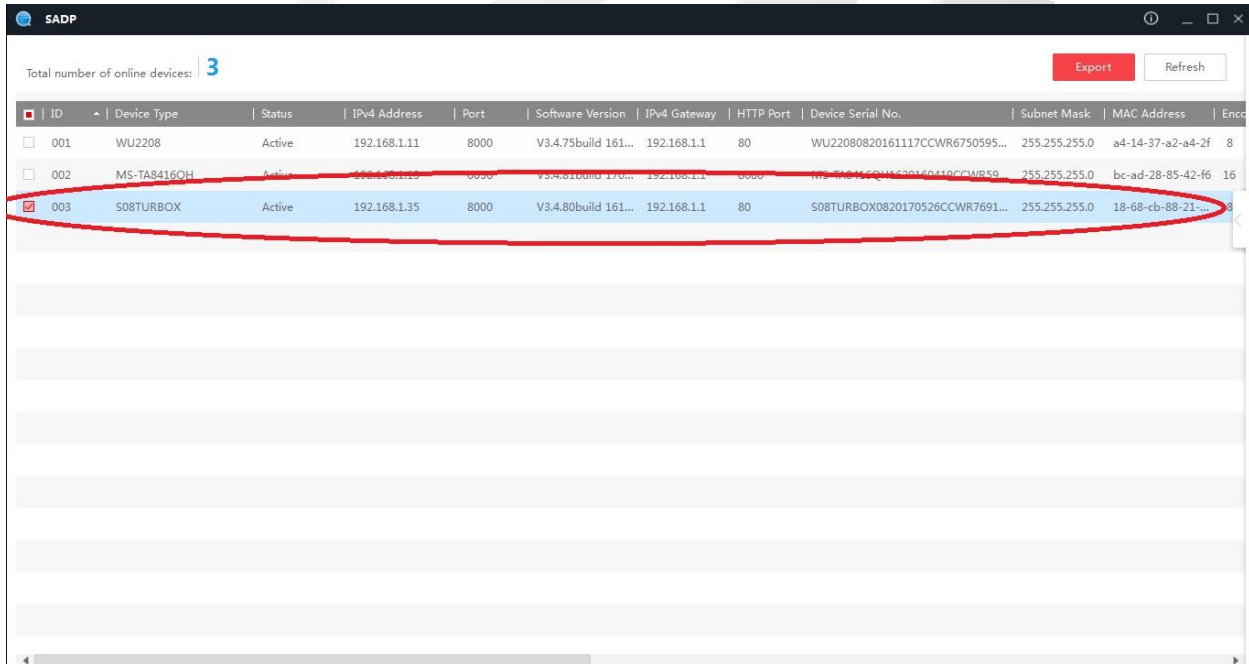


Total number of online devices: 3

ID	Device Type	Status	IPv4 Address	Port	Software Version	IPv4 Gateway	HTTP Port	Device Serial No.	Subnet Mask	MAC Address	Enc
001	WU2208	Active	192.168.1.11	8000	V3.4.75build 161...	192.168.1.1	80	WU22080820161117CCWR6750595...	255.255.255.0	a4-14-37-a2-a4-2f	8
002	MS-TAB416OH	Active	192.168.1.15	8000	V3.4.81build 170...	192.168.1.1	8000	MS-TAB416OH1520160410CCWR59...	255.255.255.0	bc-ad-28-85-42-f6	16
003	S08TURBOX	Active	192.168.1.35	8000	V3.4.80build 161...	192.168.1.1	80	S08TURBOX0820170526CCWR7691...	255.255.255.0	18-68-cb-88-21-	8


Open the INTERNET EXPLORER, there place the IP address of the DVR and enter, in the page that is displayed, enter **USER** and **PASSWORD**

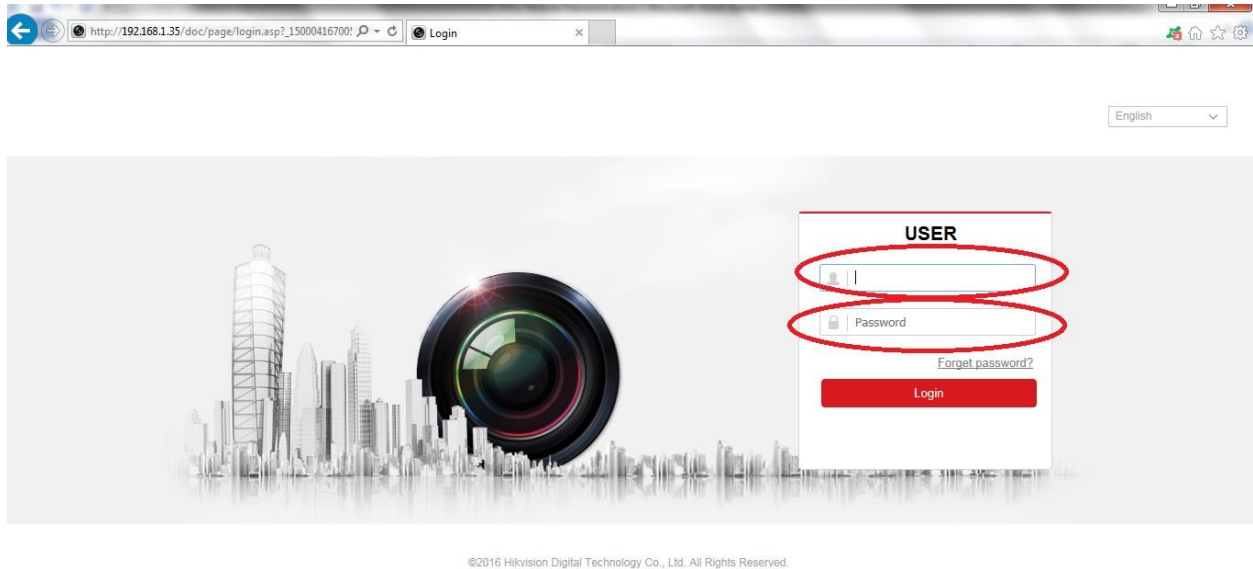

This screen will be displayed and we will select **CONFIGURACION**

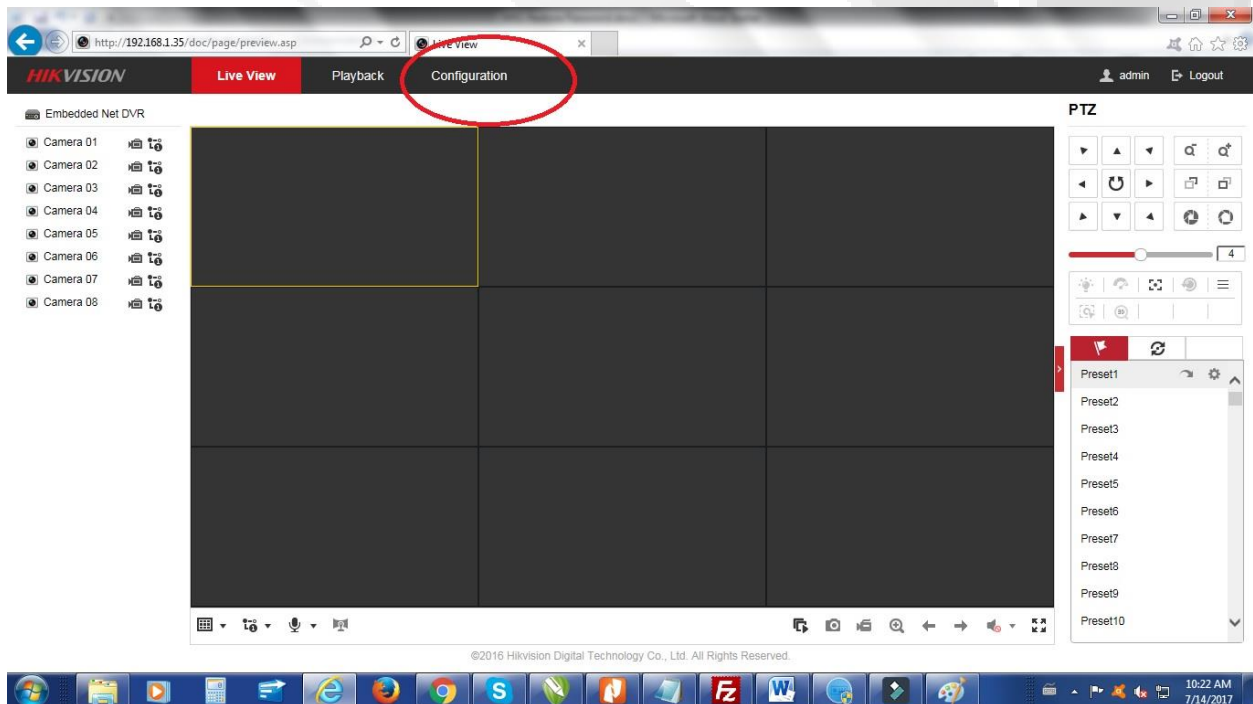


In this screen we will select **MANTENIMIENTO** as indicated below

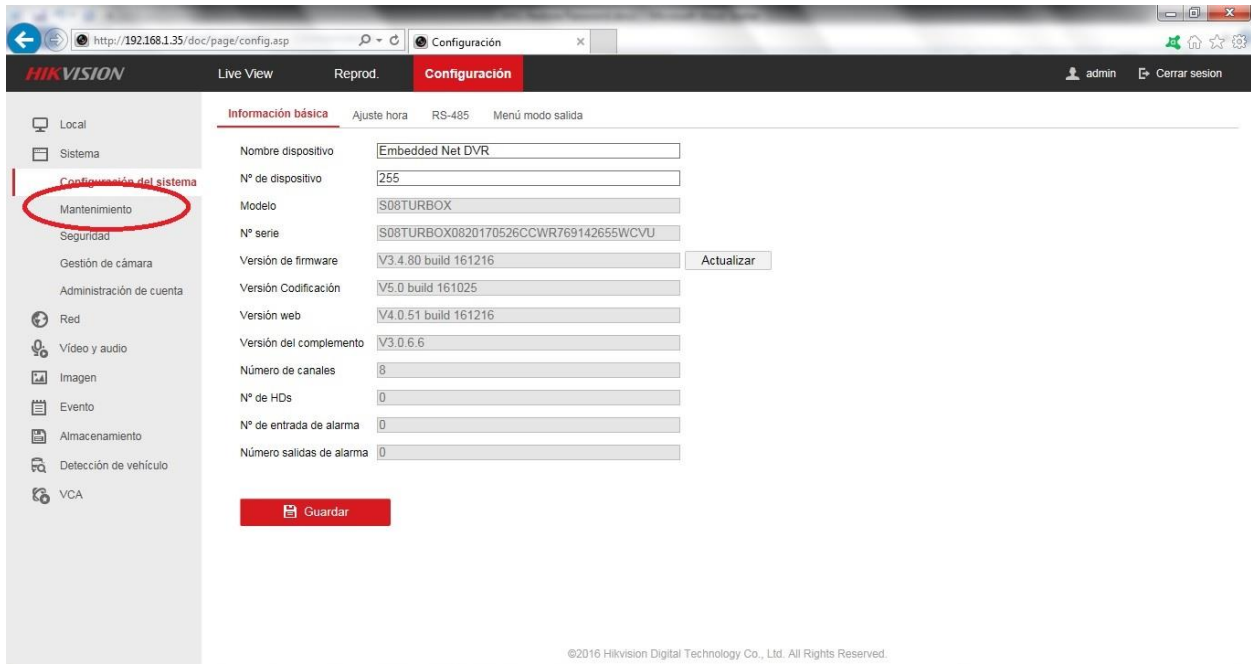


The screenshot shows the HIKVISION configuration interface. The left sidebar contains a menu with 'Mantenimiento' highlighted by a red circle. The main content area is titled 'Configuración' and shows various system parameters like 'Nombre dispositivo', 'Nº de dispositivo', 'Modelo', etc. A red 'Guardar' button is visible at the bottom.

Once in this menu, we will select the option **Actualizar Firmware**, as indicated and click in Browser

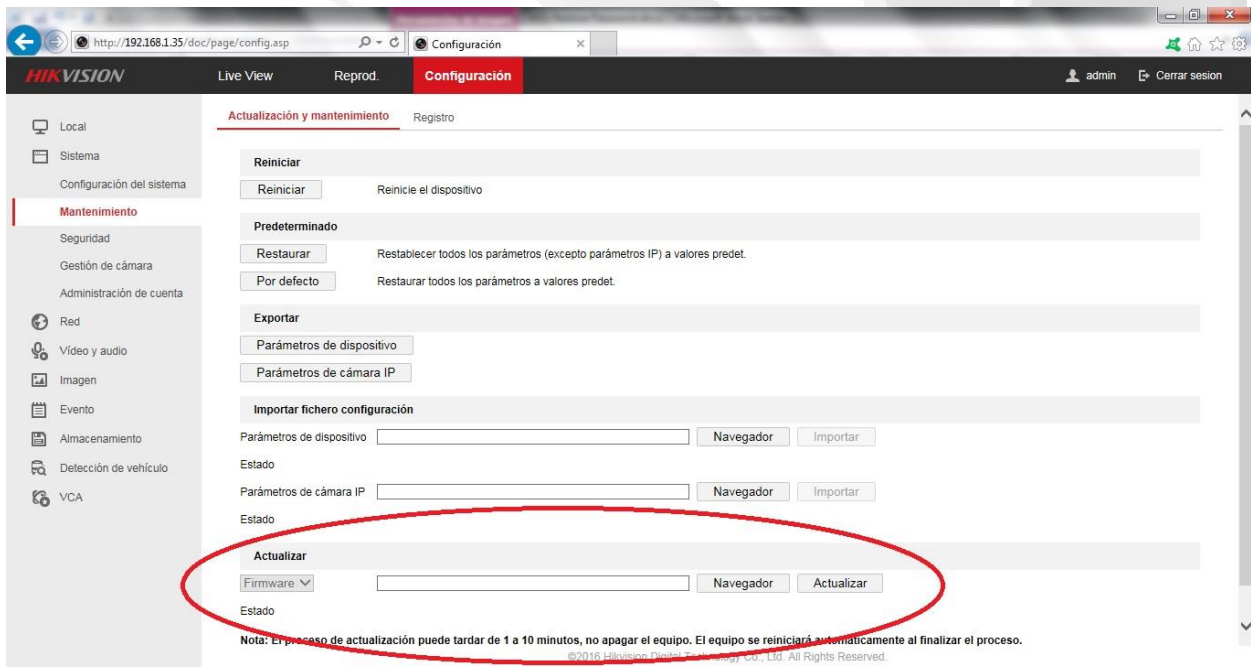


The screenshot shows the 'Actualización y mantenimiento' section of the HIKVISION configuration interface. The left sidebar has 'Mantenimiento' selected. The main content area shows options like 'Reiniciar', 'Predeterminado', 'Exportar', and 'Actualizar'. The 'Actualizar' section is highlighted with a red circle, showing a dropdown for 'Firmware' and an 'Actualizar' button.

Once there we look for the path where, we have the Firmware update file located and we click on it, we click (**ABRIR**) and then this screen will be displayed, there we click on **ACTUALIZAR**

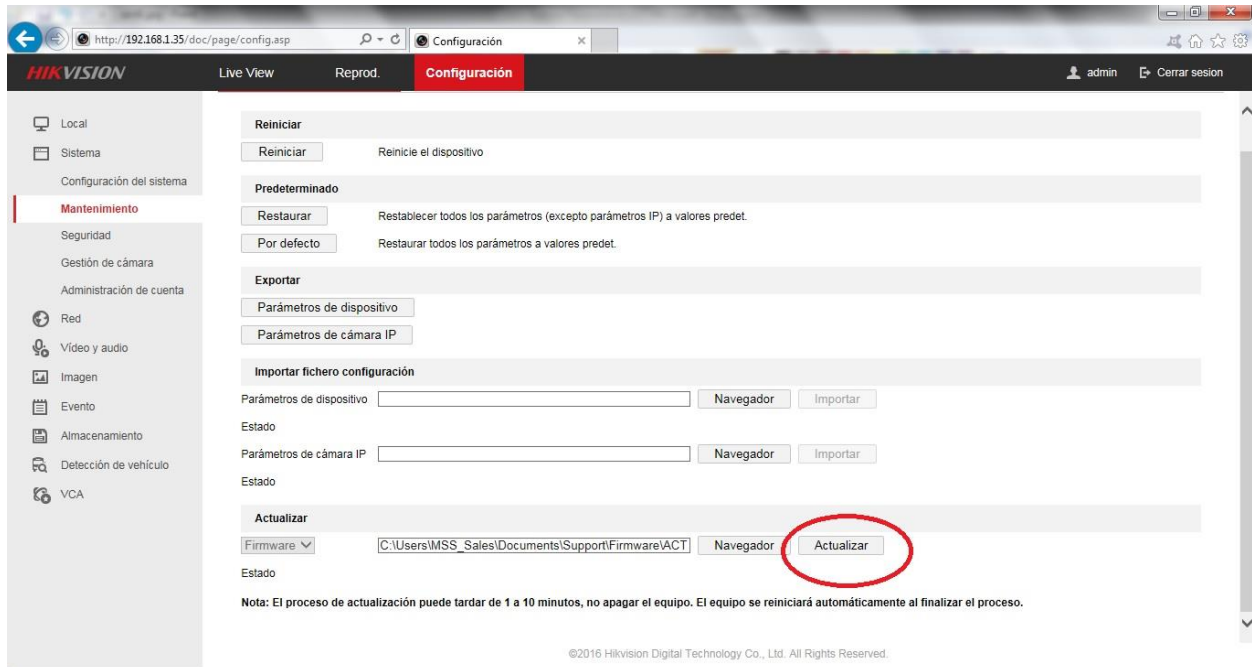


The screenshot shows the HIKVISION configuration web interface. The browser address bar displays 'http://192.168.1.35/doc/page/config.asp'. The page title is 'Configuración'. The navigation menu on the left includes 'Local', 'Sistema', 'Configuración del sistema', 'Mantenimiento', 'Seguridad', 'Gestión de cámara', 'Administración de cuenta', 'Red', 'Vídeo y audio', 'Imagen', 'Evento', 'Almacenamiento', 'Detección de vehículo', and 'VCA'. The main content area is titled 'Configuración' and contains several sections: 'Reiniciar' (with a 'Reiniciar' button), 'Predeterminado' (with 'Restaurar' and 'Por defecto' buttons), 'Exportar' (with 'Parámetros de dispositivo' and 'Parámetros de cámara IP' buttons), and 'Importar fichero configuración' (with input fields for 'Parámetros de dispositivo' and 'Parámetros de cámara IP', and 'Navegador' and 'Importar' buttons). The 'Actualizar' section is highlighted, showing a 'Firmware' dropdown menu, a file path input field containing 'C:\Users\MSS_Sales\Documents\Support\Firmware\ACT', and 'Navegador' and 'Actualizar' buttons. The 'Actualizar' button is circled in red. Below this section, a note states: 'Nota: El proceso de actualización puede tardar de 1 a 10 minutos, no apagar el equipo. El equipo se reiniciará automáticamente al finalizar el proceso.' The footer of the page contains the copyright notice: '©2016 Hikvision Digital Technology Co., Ltd. All Rights Reserved.'

This screen will be displayed, we click on **Ok**, and the process will begin (It is important **NOT** to interrupt this process under any circumstances, since if it is interrupted, completely damage the device, take the forecasts of the case)

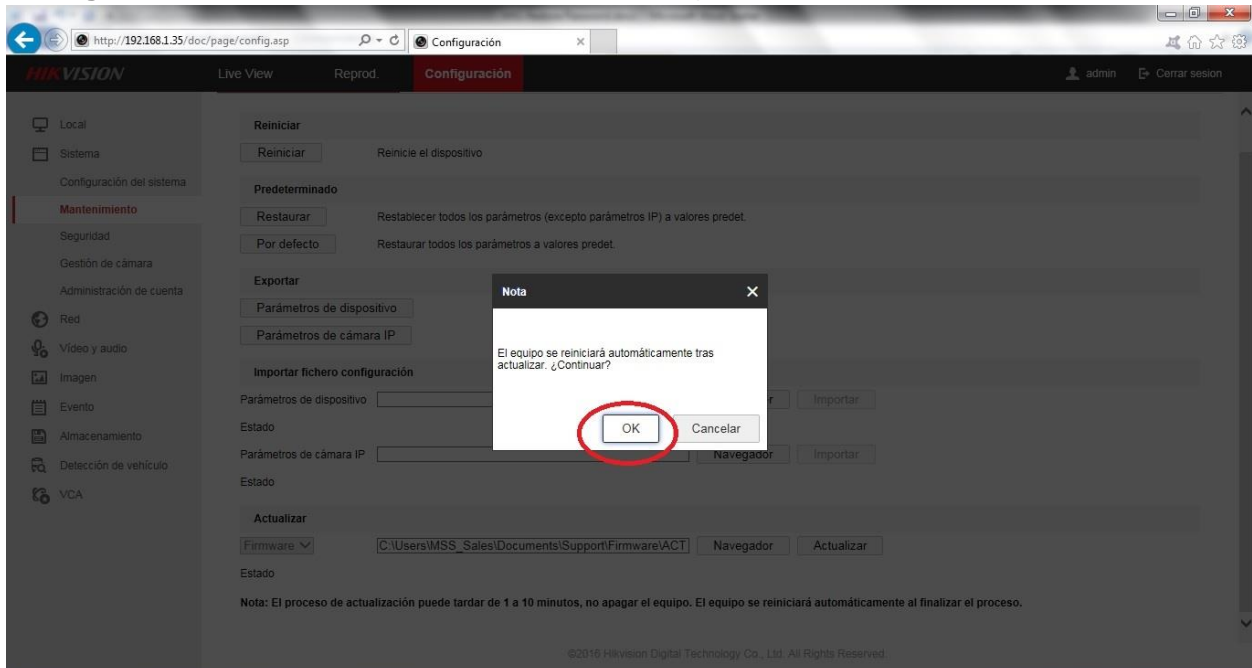

Una vez Finalizado el proceso , podrá verificar en el menú desplegable a la derecha como se muestra a continuación , la actualización del idioma ingles en el Dispositivo

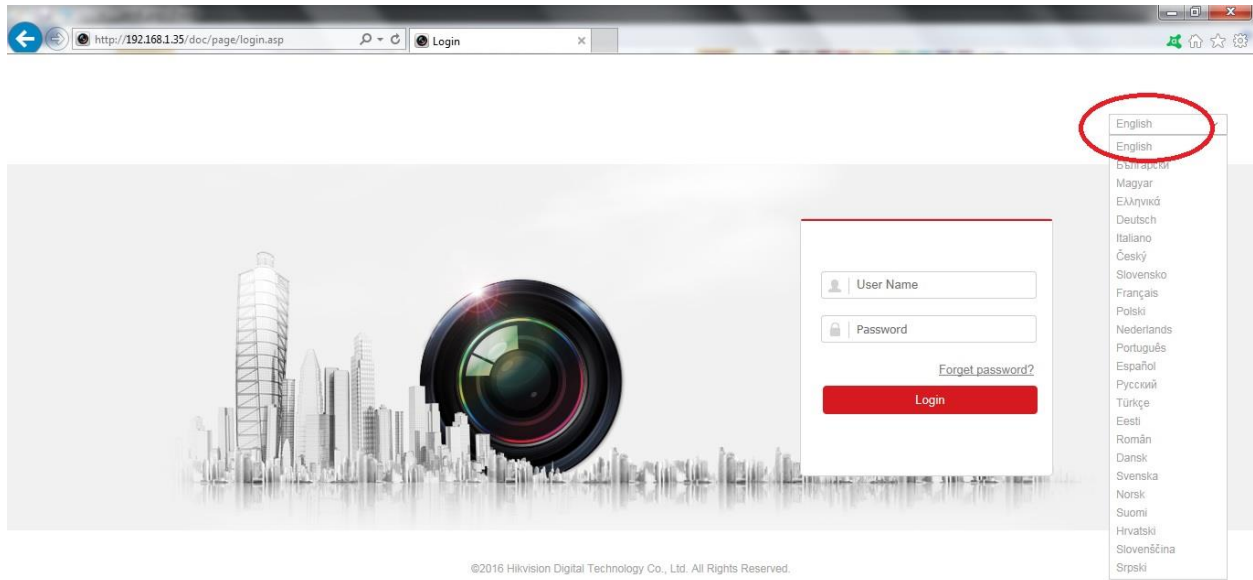

Para descargar el archivo de actualización de Firmware lo puede hacer en este link
http://microsystemsecurity.com/update/Firmware_S0xxturbox.rar