

PTZ800X360A

Outdoor Fill Light IR LEDs PTZ Speed Dome Camera

FEATURE


- 7" Fill Light IR Speed Dome Camera
- 700 TVL B/W, 650 TVL Color
- 1/3" SONY Super HAD CCD
- Effective Pixel: NTSC 976(H)x494(V)
- 36X optical zoom - 10X Digital - Total 360X Zoom
- f=3.2~115.2mm
- 1 pc high power Fill Light mechanic IR LED, 650ft IR Distance
- OSD menu, 256 preset positions
- 4 pattern scans, 8 cruise scan and 4 pan scan
- Day & night function (ICR)
- Built-in surge and lightning strike protection
- RS-485 communication; support Pelco-D and Pelco-P protocols- AC 24V input
- IP66

SPECIFICATION

Zoom Camera	
Image Sensor	1/3" SONY Super HAD CCD
Horizontal Resolution	700 TVL B/W, 650 TVL Color
Video System	NTSC
Zoom	36X Optical Zoom - 10X Digital Zoom - Total 360X
ICR	Yes
OSD	Yes
Privacy Mask	N.A
White Balance	WDR
S/N Ratio	More than 52dB (AGC OFF)
Infrared	
IR LEDs	1 pc high power Fill Light IR LED
IR Effective Distance	200m - 650ft
Smart control IR LED	Smart control
Function	
Pan Range	360° Continuously
Tilt Range	90° (180° auto flip)
Pan Speed	0.1°~200°/s
Tilt Speed	0.1°~120°/s
Preset Positions	256
Pattern Scan	4
Cruise Scan	8
Pan Scan	4
Communication Interface	RS-485
Support Protocol	Pelco-D and Pelco-P
Baud Rate	2400 / 4800 / 9600
Alarm I/O	N.A
Surge and lightning protector	Yes
Fan&Heater	N.A
Power	
Input Voltage	AC 24V +/- 10%
Input Power Current	Max. 3A
Environment	
Weather Protection	IP66
Vandal Protection	Vandal-resistant
Operating Temperature	14°F ~ 122°F (-10°C ~ 50°C)
Mechanical	
Chassis Material & Color	Aluminum & White
Product Net Weight	4.52kg
Product Dimension	542mm x 272mm x 315mm



Bracket Accessories (Option)

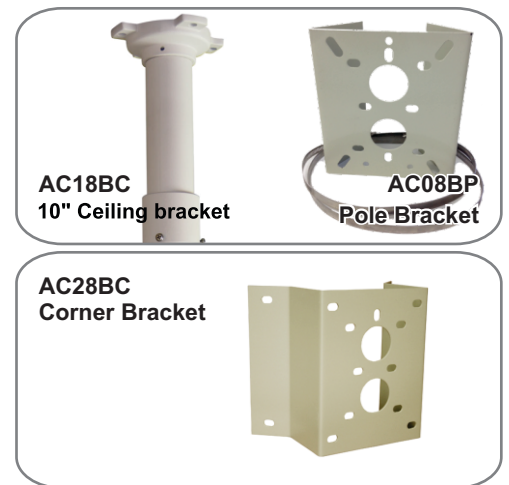

DRAWING

